

mr.steam®speakers

Installation Instructions

Model MS-Speaker


- Cut speaker mounting hole using the template provided

! CAUTION All audio wiring shall be installed in accordance with National Electric Code and local electrical codes.

- Attached the “+” speaker wire from the stereo to the “+” terminal of the speaker. The “+” terminal is identified by a red dot.
- Attach the “-” speaker wire from the stereo to the “-” terminal of the speaker.
- Test speakers before securing to wall.

- Apply a bead of silicone RTV around the edge of the mounting hole as shown in the diagram to obtain a watertight seal.
- Remove the front grill of the speaker, and fit the speaker into the speaker-mounting hole.
- Secure the speaker in place using the stainless steel mounting screws provided.
- Apply the black butyl adhesive to the inside edge of the speaker as shown, to attach the grill to the speaker.
- Replace the speaker grills by pressing them into the butyl adhesive.
- Let the silicone cure per manufacture's instructions before using steam room.

IMPORTANT: Do not place speakers in direct contact with water or steam.

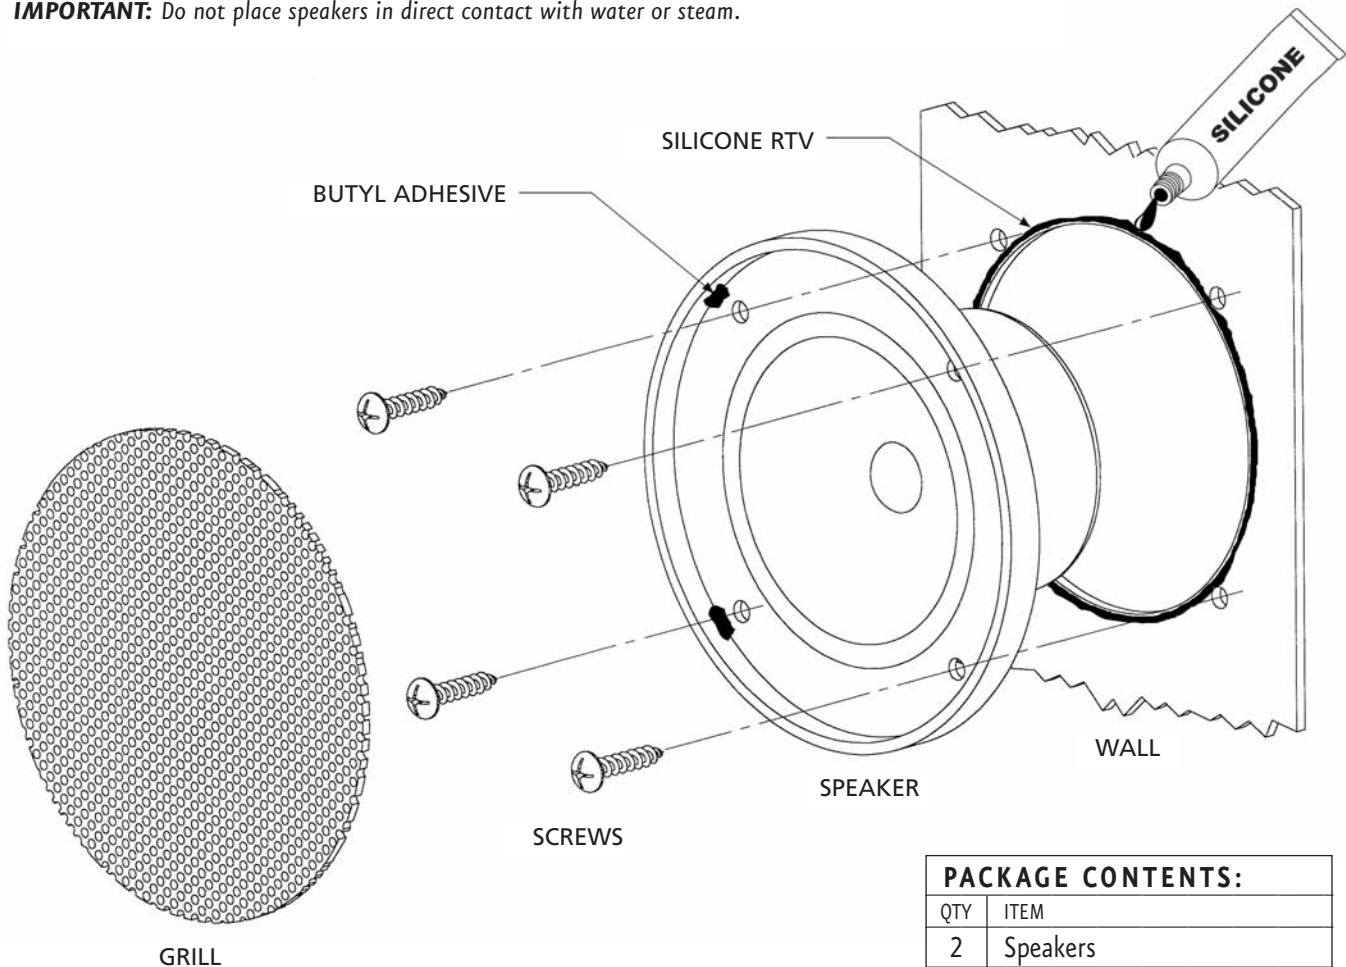

PACKAGE CONTENTS:

QTY	ITEM
2	Speakers
8	2-inch screws
8	Butyl Adhesive Squares
1	Installation Manual

mr.steam[®]speakers

Speaker Template

Model MS-Speaker

1. Determine the optimal location for the mr. steam speakers. Speaker should not be in direct contact with steam or water emission.
2. Use the templates provided to rough in the speakers. Ensure the template is scaled correctly before cutting holes.

